


Micro Mec 2





Anodised aluminium profile
 Recessed installation
 Transparent or opal polycarbonate diffuser
 Symmetrical emission
 Anodised aluminium finish

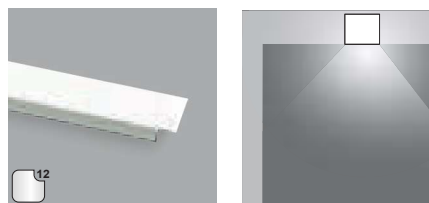


&




PROFILES

	03 19800890300	3 m
	12 19800891200	3 m



DIFFUSERS


Opaline 19700770100	3 m
Transp. 19700770000	3 m



FIXING BRACKET

13201681000

12 - 24 V SENSORS



IRS SENSOR

24201130000

ELECTRIFICATION AND CONTROL



STRIP REEL 5 mm

For the choice of Strip Reel go to page 119.



CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12606220000

3 m - 24 V: 12606230000



MEC DRIVER

See page 262 for the choice of power supply system.