


Strip reel 10 mm




Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Cold (6500K), Natural (4000K), Warm (3000K, 2700K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.



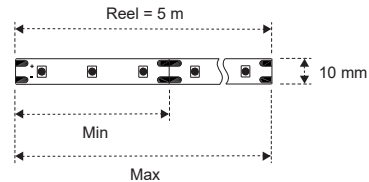

STRIP REEL 12 V


	LEDs/m	W/m	L. Min \ Max	CCT
12807400001G_	72	7,8	42 mm \ 4,6 m	_C \ _N \ _W
12807410001C_	108	11,7	27,8 mm \ 3,1 m	_C \ _N \ _W
12807420001E_	156	16,9	19,2 mm \ 2,1 m	_C \ _N \ _W
12808490002AGD	120 + 120	13	25 mm \ 2,8 m	EDC


CABLES AND CONNECTORS


 Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding. L: 3 m
12603960000


 Extension from output cable to power supply 12 V L: 1100 mm
12604220000
L: 2200 mm
12604230000

 Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version) L: 50 mm
12605010000

 Soft link lamp-to-lamp connection for both 12 V and 24 V. L: 10 cm
12603930000
L: 40 cm
12603940000
L: 70 cm
12603950000

 Bridge connector for strip segments **19700450100**


 **FIXED COLOUR TEMPERATURE**
Add the suffix **_C** for cold white (6500K), **_N** for natural white (4000K) or **_W** for warm white (3000K) to the product code


 **MEC DRIVER**
For the selection of the power supply system go to page 262


STRIP REEL 24 V


	LEDs/m	W/m	L. Min \ Max	CCT
12808190001N_	72	7,8	84 mm \ 9,2 m	_C \ _N \ _W
12808180001M_	108	11,7	55,6 mm \ 6,2 m	_C \ _N \ _W
12807430001I_	156	16,9	38,4 mm \ 4,2 m	_C \ _N \ _W
12809490000NW	72	7,8	84 mm \ 9,2 m	2700K
12809690000MW	108	11,7	55,6 mm \ 6,2 m	2700K
12809700000IW	156	16,9	38,4 mm \ 4,2 m	2700K
12808860002AHD	120 + 120	13	50 mm \ 5,6 m	EDC


CABLES AND CONNECTORS


 Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding. L: 3 m
12603920000


 Extension from output cable to power supply 24 V L: 1100 mm
12604630000
L: 2200 mm
12604620000

 Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version) L: 50 mm
12605020000

 Soft link lamp-to-lamp connection for both 12 V and 24 V. L: 10 cm
12603930000
L: 40 cm
12603940000
L: 70 cm
12603950000

 Bridge connector for strip segments **19700450100**

 **FIXED COLOUR TEMPERATURE**
Add the suffix **_C** for cold white (6500K), **_N** for natural white (4000K) or **_W** for warm white (3000K) to the product code

 **MEC DRIVER**
For the selection of the power supply system go to page 262