


Strip reel 10 mm



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Cold (6500K), Natural (4000K), Warm (3000K, 2700K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

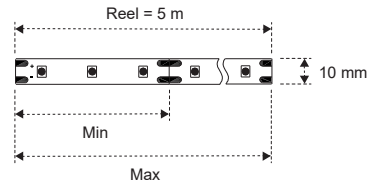

STRIP REEL 12 V

| | LEDs/m | W/m | L. Min \ Max | CCT |
|----------------|-----------|------|-----------------|--------------|
| 12807400001G_ | 72 | 7,8 | 42 mm \ 4,6 m | _C \ _N \ _W |
| 12807410001C_ | 108 | 11,7 | 27,8 mm \ 3,1 m | _C \ _N \ _W |
| 12807420001E_ | 156 | 16,9 | 19,2 mm \ 2,1 m | _C \ _N \ _W |
| 12808490002AGD | 120 + 120 | 13 | 25 mm \ 2,8 m | EDC |

CABLES AND CONNECTORS



Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.
L: 3 m
12603960000



Extension from output cable to power supply 12 V
L: 1100 mm
12604220000
L: 2200 mm
12604230000



Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)
L: 50 mm
12605010000



Soft link lamp-to-lamp connection for both 12 V and 24 V.
L: 10 cm
12603930000
L: 40 cm
12603940000
L: 70 cm
12603950000



Bridge connector for strip segments
19700450100



FIXED COLOUR TEMPERATURE
Add the suffix **_C** for cold white (6500K), **_N** for natural white (4000K) or **_W** for warm white (3000K) to the product code



MEC DRIVER
For the selection of the power supply system go to page 262

STRIP REEL 24 V

| | LEDs/m | W/m | L. Min \ Max | CCT |
|----------------|-----------|------|-----------------|--------------|
| 12808190001N_ | 72 | 7,8 | 84 mm \ 9,2 m | _C \ _N \ _W |
| 12808180001M_ | 108 | 11,7 | 55,6 mm \ 6,2 m | _C \ _N \ _W |
| 12807430001I_ | 156 | 16,9 | 38,4 mm \ 4,2 m | _C \ _N \ _W |
| 12809490000NW | 72 | 7,8 | 84 mm \ 9,2 m | 2700K |
| 12809690000MW | 108 | 11,7 | 55,6 mm \ 6,2 m | 2700K |
| 12809700000IW | 156 | 16,9 | 38,4 mm \ 4,2 m | 2700K |
| 12808860002AHD | 120 + 120 | 13 | 50 mm \ 5,6 m | EDC |

CABLES AND CONNECTORS



Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.
L: 3 m
12603920000



Extension from output cable to power supply 24 V
L: 1100 mm
12604630000
L: 2200 mm
12604620000



Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version)
L: 50 mm
12605020000



Soft link lamp-to-lamp connection for both 12 V and 24 V.
L: 10 cm
12603930000
L: 40 cm
12603940000
L: 70 cm
12603950000



Bridge connector for strip segments
19700450100



FIXED COLOUR TEMPERATURE
Add the suffix **_C** for cold white (6500K), **_N** for natural white (4000K) or **_W** for warm white (3000K) to the product code



MEC DRIVER
For the selection of the power supply system go to page 262