





Smart Sensor CONTROLLER

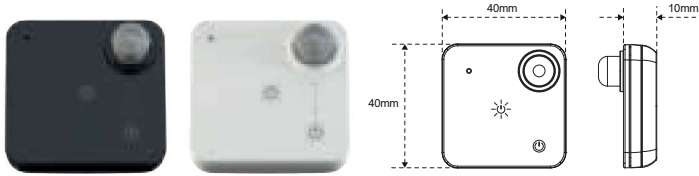

- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)


SMART SENSOR

TYPE

 01	24200750101	Mono \ EDC
 03	24200750300	Mono \ EDC

PIR sensor or wireless touch controller. When the sensor is activated, the minimum ambient brightness can be set, above which the light is not to be switched on, the switch-on time and the detection distance of the sensor can also be adjusted. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour).

Smart Switch CONTROLLER

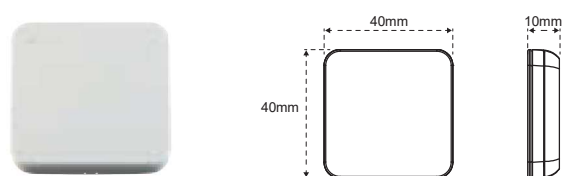

- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)



SMART SWITCH

TYPE

 01	24200660100	Mono \ EDC
--	-------------	------------

Wall mounted remote control ideal for retrofitting; it shapes the standard buttons into a wireless controller and integrates with the existing system without the need for further intervention. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour). Wireless technology allows you to control new areas of light.

Smart Sensor O SENSOR

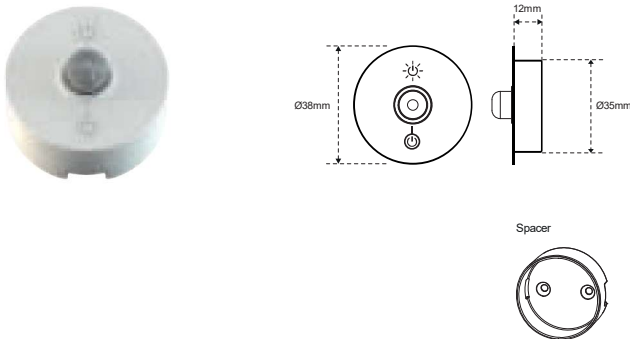

- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)


SMART SENSOR O

TYPE

 01	24201180100	Mono \ EDC
--	-------------	------------

PIR sensor or wireless touch controller. When the sensor is activated, the minimum ambient brightness can be set, above which the light is not to be switched on, the switch-on time and the detection distance of the sensor can also be adjusted. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour).

Smart Gateway HUB

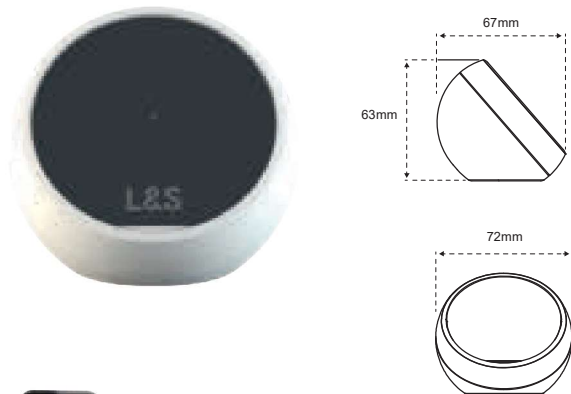

- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)

SMART GATEWAY

TYPE

 01	24200700100	Mono \ EDC
--	-------------	------------

GATEWAY, the evolution of the network where electrical devices communicate with each other, and the control interface becomes the smartphone, tablet or PC. Through the Hub control panel, it is possible to connect control panels and electrical devices. The control interface with the App connects to the central Hub via Wi-Fi with a direct access point on the Hub. The Hub control unit, in turn, communicates with the lights of the system via radio. Reliability and control over long transmission distances.