





Mec 2

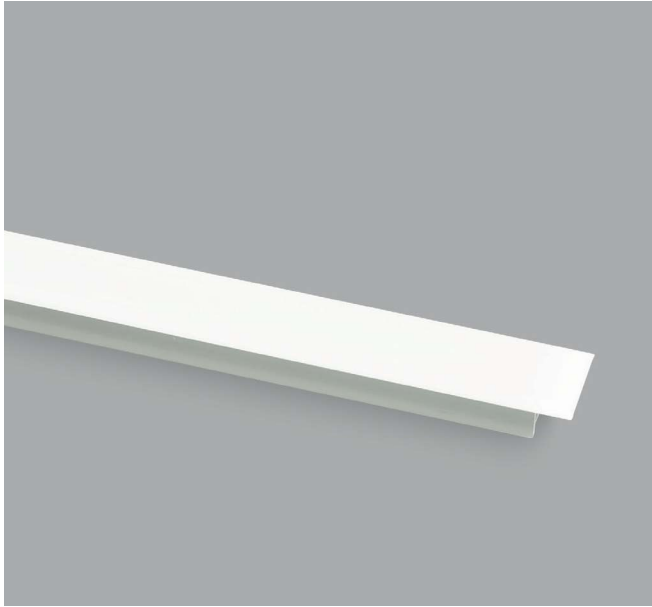


PROFILES

	19700280300	3 m
	19700281200	3 m



DIFFUSERS


Opaline 19700130100	3 m
Transp. 19700130000	3 m




FIXING BRACKET

13201100000

Anodised aluminium profile
Recessed installation
Transparent or opal polycarbonate diffuser
Symmetrical emission
Anodised aluminium finish

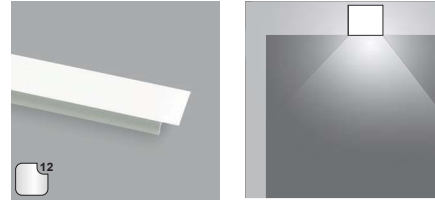


12 - 24 V SENSORS



IRS SENSOR

Mono: 12807580001
EDC: 12808880001



TOUCH SENSOR

12807510001



PIR SENSOR

12807570001

ELECTRIFICATION AND CONTROL



STRIP REEL 10 mm

For the choice of Strip Reel go to page 118.



CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000
3 m - 24 V: 12603920000



MEC DRIVER

See page 262 for the choice of power supply system.