



## Strip reel 5 mm




Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Micro Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Natural (4000K), Warm (3000K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

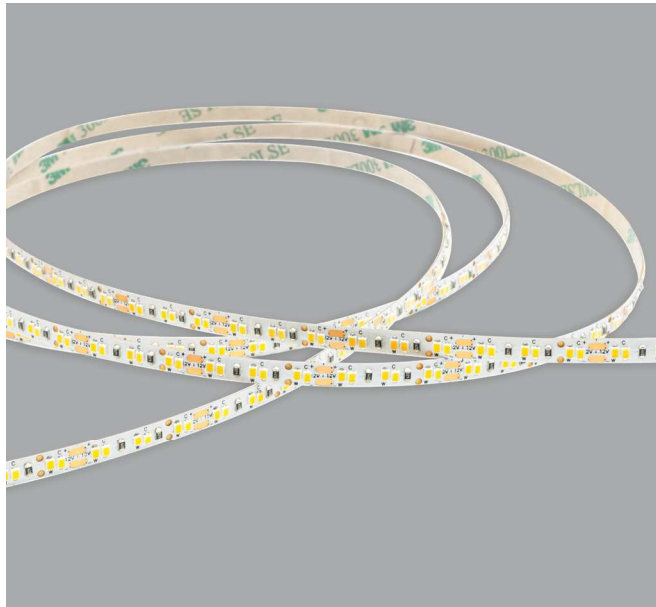

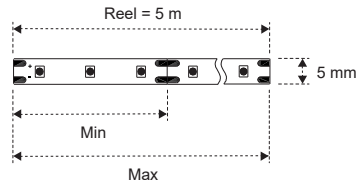

### STRIP REEL 12 V


|                | LEDs/m    | W/m | L. Min \ Max  | CCT     |
|----------------|-----------|-----|---------------|---------|
| 12810230000AN_ | 180       | 13  | 25 mm \ 2,8 m | _N \ _W |
| 12809720000AUD | 120 + 120 | 13  | 25 mm \ 2,8 m | EDC     |


### CABLES AND CONNECTORS

 Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding. L: 3 m  
**12606220000**

 Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version) L: 50 mm  
**12605010000**

 Soft link lamp-to-lamp connection for both 12 V and 24 V. L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**


 **FIXED COLOUR TEMPERATURE**  
Add the suffix **\_N** for natural white (4000K) or **\_W** for warm white (3000K) to the product code


 **MEC DRIVER**  
For the selection of the power supply system go to page 262


### STRIP REEL 24 V


|                | LEDs/m    | W/m | L. Min \ Max  | CCT     |
|----------------|-----------|-----|---------------|---------|
| 12810240000AM_ | 180       | 13  | 50 mm \ 5,6 m | _N \ _W |
| 12809730000APD | 120 + 120 | 13  | 50 mm \ 5,6 m | EDC     |


### CABLES AND CONNECTORS

 Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding. L: 3 m  
**12606230000**

 Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version) L: 50 mm  
**12605020000**

 Soft link lamp-to-lamp connection for both 12 V and 24 V. L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**

 **FIXED COLOUR TEMPERATURE**  
Add the suffix **\_N** for natural white (4000K) or **\_W** for warm white (3000K) to the product code

 **MEC DRIVER**  
For the selection of the power supply system go to page 262