

Showcase and Shelf

LUXURY RETAIL COLLECTION

A SPECIAL
SELECTION OF
LIGHTING
SOLUTIONS
FOR SHOWCASE
AND SHELF



Each object has its own light

Emphasize the attractiveness, colours and appearance of what you would like to show for jewellery, fashion and cosmetic



Beauty and elegance protagonist through light. A seemingly simple element, which requires specific skills to achieve the desired effect.

Index

Showcase

08-09	Rigel 30
10-11	Enif
12-17	Avior
18-19	Orione
20-21	Wall grazer
22-23	Bridge II
24-25	Bridge Curved
26-27	Jupiter

Shelf

30-31	Punto
32-33	Punto Pro
34-35	Microline 45
36-37	Nano Tubular II
38-39	Starlink

SHOWCASE



The RIFGEL 30 is a miniature dimmable spotlight with multiple optical options, ideal for retail and museums.
RIFGEL 30 是一款微型可调光射灯，具有多种光学选项，是零售及博物馆的理想选择。

- 

High light efficiency
高光效
- 

Mini size design
迷你尺寸设计
- 

20 degree adjustable
20度可调节
- 

Excellent passive heat dispatching design
被动散热设计








RIGEL 30

SPOTLIGHTS
点光源系列





SPECIFICATION 技术参数

mA	350mA
W	1W
Ra	Ra90
K	3000K / 3500K / 4000K
	15° / 36°
FINISH	 ⁰³ BLACK 黑色  ⁰⁶ BROWN 棕色  ¹² AD AL 铝本色
	Recessed Mounted 嵌入式安装

RIGEL 30 1W			lx
H cm	DIAMETER cm	BEAM ANGLE	4000K
30	19	36°	1941
50	32		699
60	38		485
100	64		175
300	191		19

DIMENSIONS(MM) 尺寸

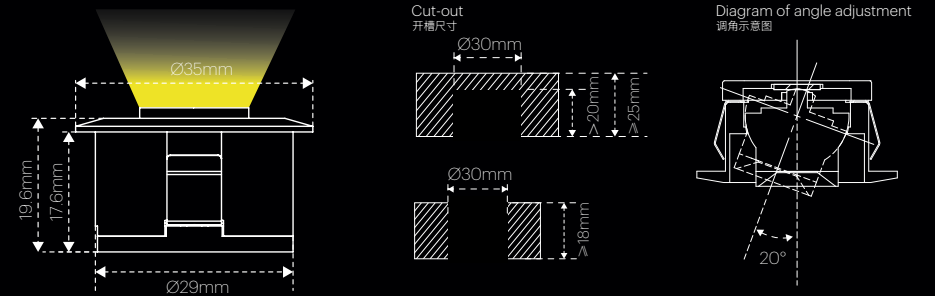

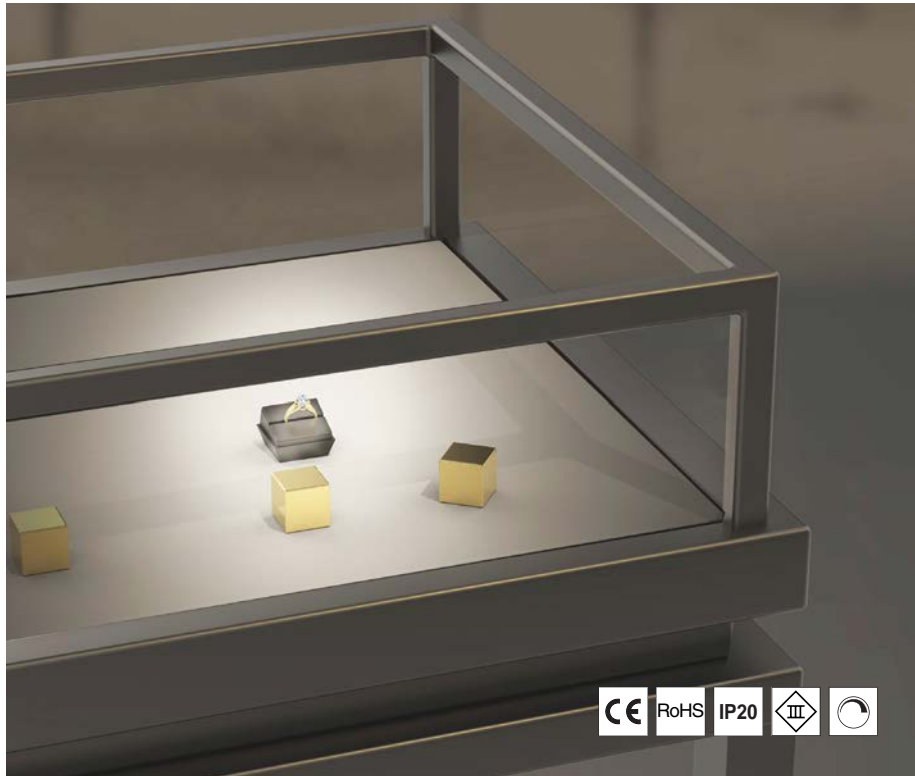

Enif is the latest innovation from L&S retail lighting team, which is with wireless power supply system. The cubic spot could be put freely around the displayed object as long as the spot is within the electromagnetic field integrated underneath the fibre of the tray. Excellent passive heat dispatching design. Spot adjustable and snoot removable. You need to configure your own fleece up to 2.5 mm thickness.

Enif 是 L&S 零售照明团队的最新创新，它采用了无线供电系统。立体光斑可以在展示的物体周围自由放置，只要光斑在托盘纤维下方集成的电磁场内。具有优秀的被动散热设计以及点状调节和鼻翼可拆卸。另外需自行配置 2.5 毫米以内厚度的绒布。




High light efficiency
高光效



Wireless power modules
无线电源模块



Extra Low Voltage safe input
超低电压安全输入



10

ENIF

SPOTLIGHTS
点光源系列



SPECIFICATION 技术参数

Vdc 12VDC

W 1.5W(no transmitter)

Ra Ra95

K 2700K / 3000K / 3500K

LUMEN (Lu) 80lm


Beam Angle 15° / 24° / 36°

FINISH 03 BLACK 黑色 18 GOLDEN 金色 09 CHROME 铬色 12 AD AL 铝本色

Installation Magnetic Installation
磁吸安装

ENIF 2.7W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		24°	4000K
20	11		5901
30	14		3320
50	21		1475
100	35		531
300	106		59

DIMENSIONS(MM) 尺寸

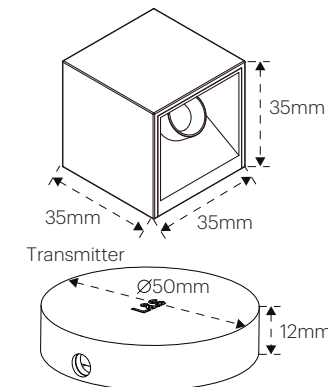

11



AVIOR

ELECTRIFIED MODULAR SYSTEMS

迷你轨道灯

Avior is a mini track system consisting of single spot adjustable module, 2 spot lens linear module and diffusing linear module. The installation could be recessed, surface mounted and freestanding fixed. Lighting source, Ra95, SDCM \leq 3, ideal for Retail and Museum scopes.

Avior 是一个迷你轨道系统，由单点可调模块、两点透镜线性模块和漫射线性模块组成。安装方式可以是嵌入式、表面安装和独立式固定。光源，Ra95，SDCM \leq 3，适用于零售和博物馆范围。





AVIOR A




24VDC	1.5W	Ra90	3000K / 3500K / 4000K	95lm	15°	
					24°	
					36°	
					42°	
					Elliptical	

AVIOR L



24VDC	2.5W	Ra90	3000K / 3500K / 4000K	190lm	15°	
					24°	
					36°	
					42°	
					Elliptical	

AVIOR D







24VDC	2.5W	Ra90	3000K	120lm	120°	
			3500K			
			4000K			

AVIOR A PLUS



24VDC	4.2W	Ra90	3000K / 3500K / 4000K	290lm	15°	
					24°	
					36°	
					60°	
					Elliptical	

DIMENSIONS(MM) 尺寸

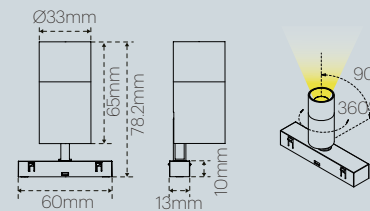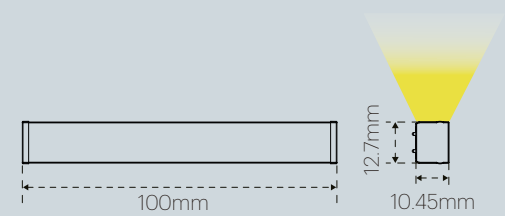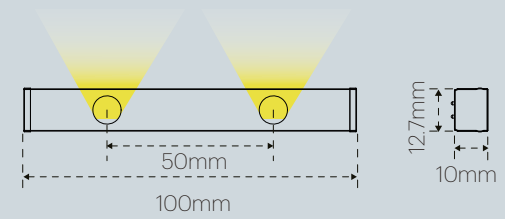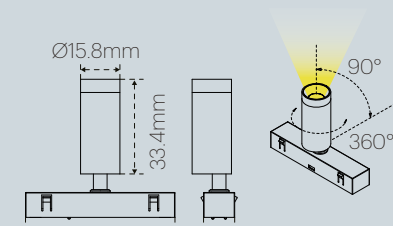

AVIOR TRACK & ACCESSORIES







FIXING BRACKET




TRACK COVER



DIMENSIONS(MM) 尺寸

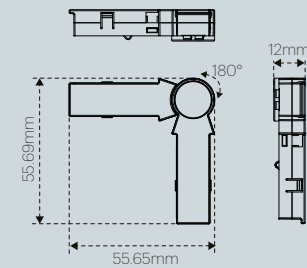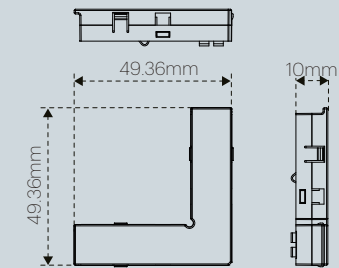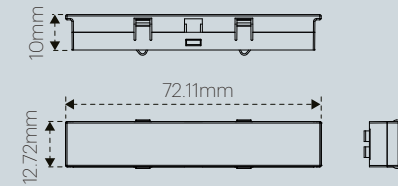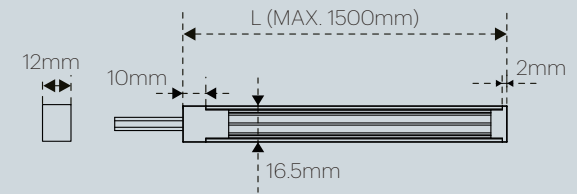


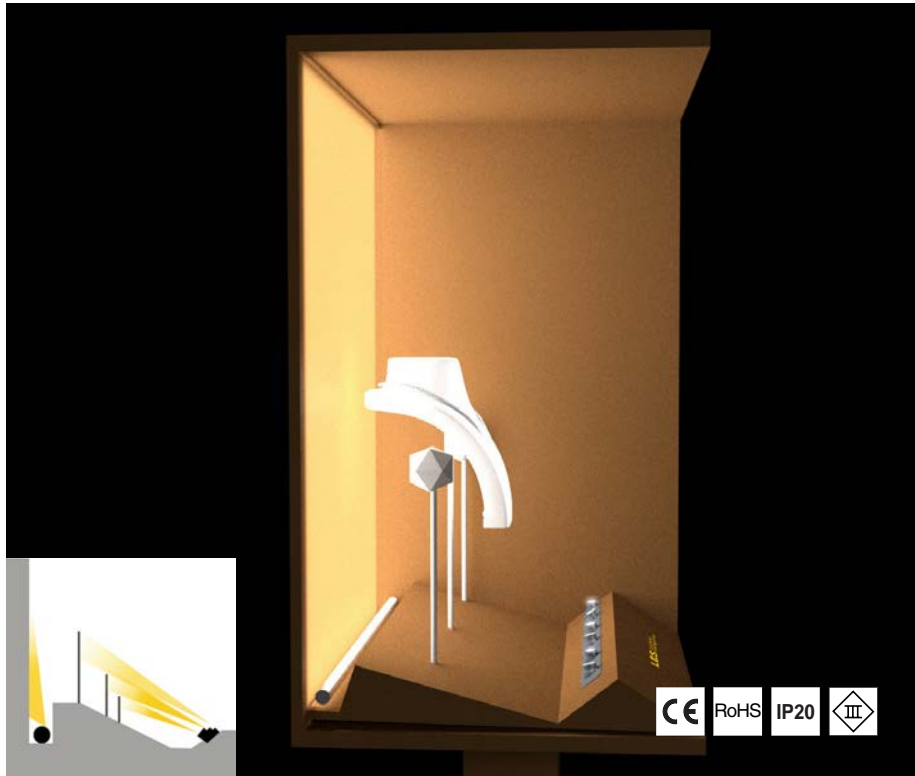

In the showcase, ORIONE and WALL GRAZER are great partners who work together seamlessly. The combination of backlighting and frontal lighting allows exhibits and cabinets to be illuminated in an ideal way. Unseen lighting products make the space more comfortable and attractive, and this is a comprehensive showcase lighting solution that can be customized to fit the space.

在展示柜中，ORIONE 和 WALL GRAZER 是合作无间的好伙伴，背光和正面照明相结合的方式，让展品和柜子以理想的方式被照亮。看不到照明产品的存在，让空间更舒适美观，这是一套整体的展柜照明解决方案，可以根据空间进行定制。

-  25 degrees adjustable
25度可调节
-  Angle of light output selectable
出光角度可选
-  Easy installation
安装便捷
-  Modules can be quickly spliced
模块可快速拼接

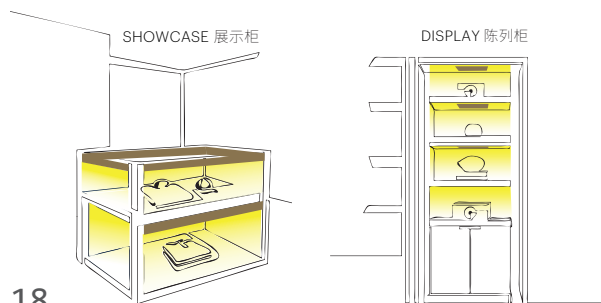

ORIONE

SPOTLIGHTS
点光源系列




SPECIFICATION 技术参数

- V_{DC}** 24VDC
- W** 20W/m
- Ra** Ra95
- K** 2700K / 3000K / 3500K / 4000K
- LUMEN (Lu)** 217lm/m(3500K)
- lm/w** 88lm/w(3500K)
-  15° / 25° / 36° / 80° / 20×50°
- FINISH**  03 BLACK 黑色  12 AD AL 铝本色
-  Magnetic Installation
磁吸安装

ORIONE 2.5W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		36°	3500K
30	18		7541
50	29		2715
60	35		1885
100	58		679
300	175		75

DIMENSIONS(MM) 尺寸

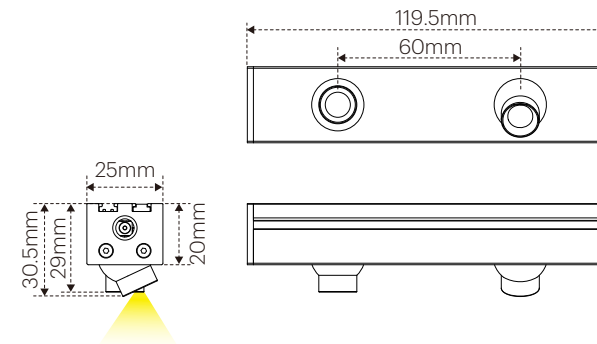



Wall Grazer with soft light creates a strong sense of depth and lightness. The special linear asymmetric optical lens enables it to create a cosy atmosphere.

Wall Grazer 非常擅长通过轻柔的光线让空间显得更轻盈更有层次。特制的线性透镜和精准的照射角度，是它营造舒适氛围的秘诀之一。

-  Soft light
光线柔和
-  25° asymmetric wash-washer
25° 偏光洗墙
-  Ultrafine diameter of 13mm
超细直径13毫米
-  LENGTH CUSTOMIZABLE
长度可定制

BACKGROUND LIGHT 背光



WALL WASH 洗墙



WALL GRAZER

LINEAR LIGHTS
线条灯系列




SPECIFICATION 技术参数

- Vdc** 24VDC
- W** 19W/m
- Ra** Ra90
- K** 3000K / 3500K / 4000K
- LUMEN (Lu)**
1142lm/m (3000K)
1092lm/m (3500K)
1127lm/m (4000K)
- Asymmetric 25°**
- FINISH**
03 BLACK 黑色
12 AD AL 铝本色
- Screw Installation**
螺丝安装
- Magnetic Installation**
磁吸安装

WALL GRAZER 300mm			lx
H mm	DIAMETER mm	BEAM ANGLE	
		60°	3000K
			3500K
			4000K
			15346
			22766
100	60		21840
			3836
200	120		5692
			5460
			1705
300	180		2530
			2427
			959
400	230		1423
			1365
			613
500	300		910
			873

DIMENSIONS(MM) 尺寸

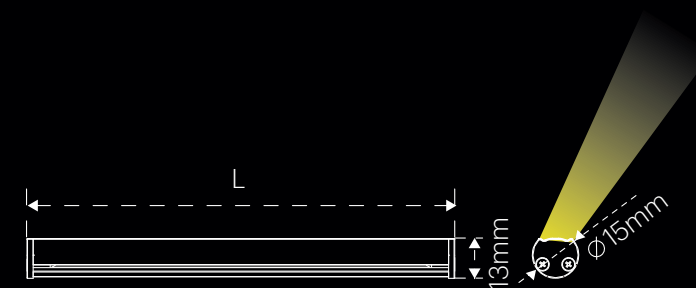




BRIDGE II is made for display, the slender lamp body is made of extruded aluminum, which can better set off the exhibits and let beauty shine.


BRIDGE II 为展示而生，灯体轻盈纤细，由挤压铝压制而成，可以更好地对展品进行衬托，让美好发光。

-  High light efficiency
高光效
-  Extra slim in size 10mm
灯体纤细10毫米
-  Rotatable 320°
320°旋转
-  Length customizable
长度可定制

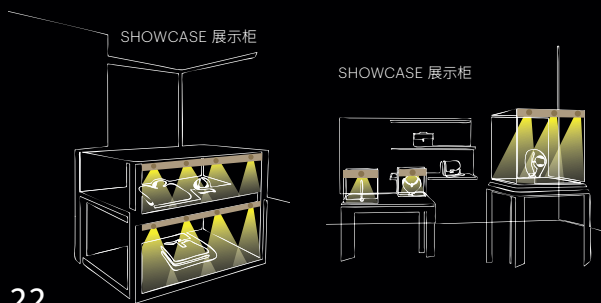




BRIDGE II

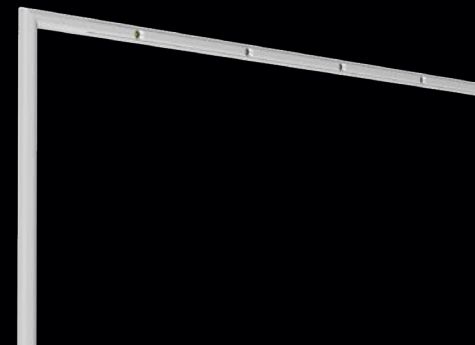LINEAR LIGHTS
线条灯系列




SPECIFICATION 技术参数

- mA** 350mA
- W** 18.7W
- Ra** Ra90
- K** 3000K / 3500K / 4000K
- LUMEN (Lu)** 930lm/m
- Beam Angle** 110°
- FINISH**
 -  ¹² AD AL 铝本色
 -  ⁰³ BLACK 黑色
-  Screw Installation
螺丝安装

BRIDGE II 910X160mm			lx
H cm	DIAMETER cm	BEAM ANGLE	
		75°	3000K
30	30		52811
40	40		29701
50	50		19601
100	100		475
300	300		13

DIMENSIONS(MM) 尺寸

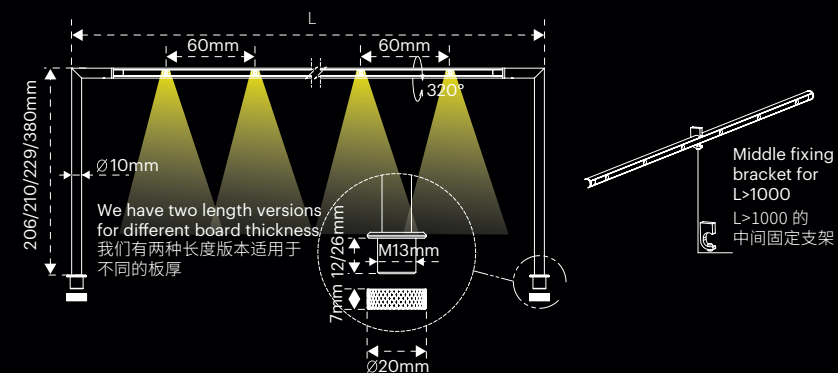



Born for the curved showcase, BRIDGE CURVE has a light and slim design and smooth natural lines, the beautiful light meanders with the shape of the showcase, making the exhibits more dazzling.

BRIDGE CURVE, 为弧形展柜而生。灯体轻盈纤细，弧形线条流畅，漂亮的光随展柜的形状蜿蜒，让展品更璀璨。



High light efficiency
高光效




Slender lamp body
灯体纤细



Uniform light
光线均匀



Length customizable
长度可定制



BRIDGE CURVE

LINEAR LIGHTS
线条灯系列






SPECIFICATION 技术参数

mA	350mA
W	16W/m
Ra	Ra95
K	3000K / 3500K / 4000K
LUMEN (Lu)	1200 lm/m
Beam Angle	120°
FINISH	<input type="checkbox"/> ¹² AD AL 铝本色 <input type="checkbox"/> ⁰³ BLACK 黑色
Installation	Screw Installation 螺丝安装

BRIDGE CURVE 12W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		120°	3000K
30	59		4704
50	98		1694
60	118		1176
100	196		423
300	588		47

DIMENSIONS(MM) 尺寸

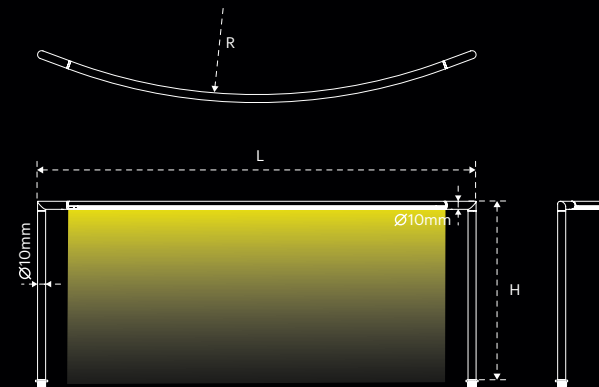

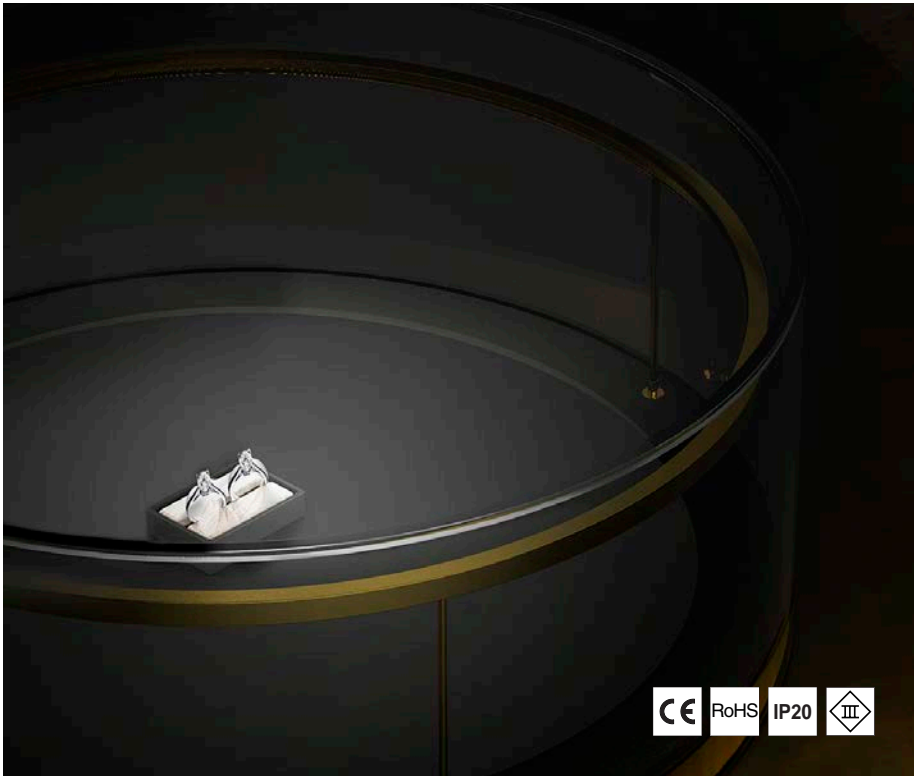

JUPITER is a highly customized product with innovation, which creates a round stage and allows lighting from 360° centering, attentions naturally attracted to the products under the lighting.

JUPITER 是一款新设计的带有定制因素的产品，它营造出了一个小型舞台的感觉，将所有的光都聚焦在圆形中央，让你的目光不由自主地停留在舞台中央的主角上。


- 

Uniform light
光线均匀
- 

45° inclined light
45度倾斜发光
- 

140° wide beam
140度宽光束
- 

360° circular lighting
360度圆环照明



JUPITER

LINEAR LIGHTS
线条灯系列



SPECIFICATION 技术参数

mA 500mA

W 24.5W

Ra Ra95

K 3500K

LUMEN (Lu) 2166lm


Beam Angle 140°

FINISH  WHITE 白色  BRASS 黄铜色

Installation  Screw Installation 螺丝安装

JUPITER D750mm			lx
H mm	DIAMETER mm	BEAM ANGLE	
		140°	3500K
200	1366		15926
300	2050		7078
500	3416		2548
1000	6833		637
3000	20363		72

DIMENSIONS(MM) 尺寸

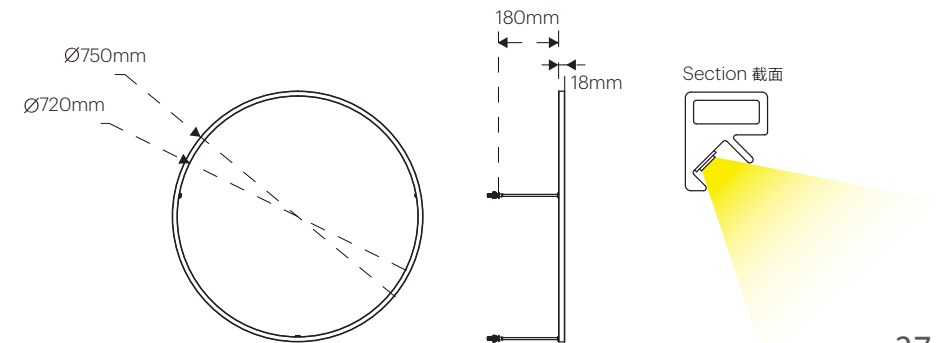

SHELF





PUNTO

LINEAR LIGHTS
线条灯系列




SPECIFICATION 技术参数

- Vdc** 24VDC
- W** 18W/m
- Ra** Ra95
- K** 2700K / 3000K / 3500K
- LUMEN (Lu)** 69lm/w (20°, 80°)
79lm/w (30°, 50°)
- ANGLE** 20° / 30° / 50° / 80°
- FINISH**  ¹² AD AL 铝本色
- INSTALLATION**  Magnetic Installation 磁吸安装


PUNTO 19W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		20°	3500K
30			76255
40	18		27452
60	22		19064
100	37		6863
300	111		763

With point-to-point light, layered with more texture, the exhibit is made more radiant.
以点对点的光，层次分明的同时更有质感，让展品更璀璨。

-  Precise focus 精准聚焦
-  Angles available 角度可选
-  Natural light 光色自然

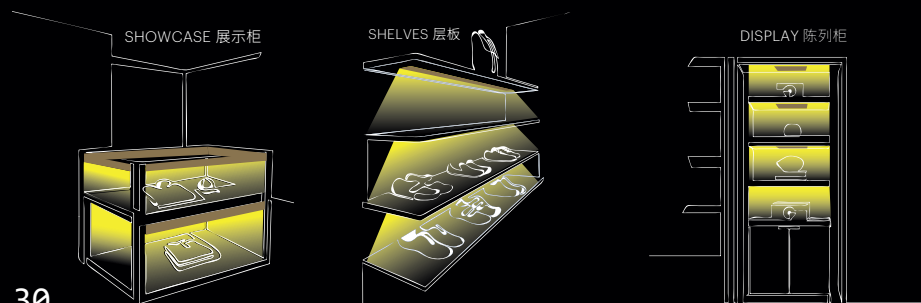

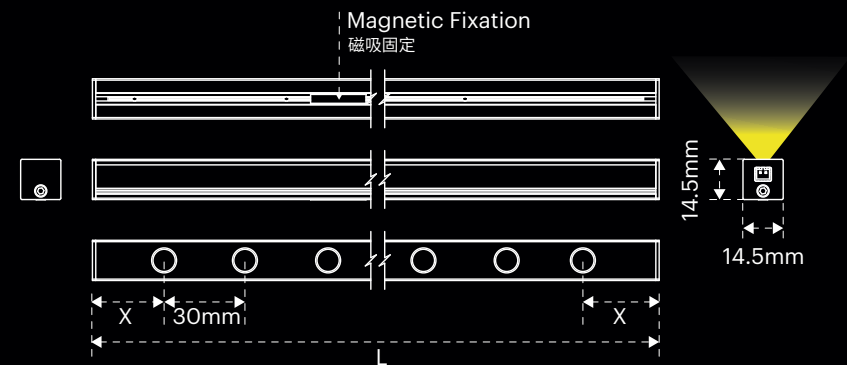


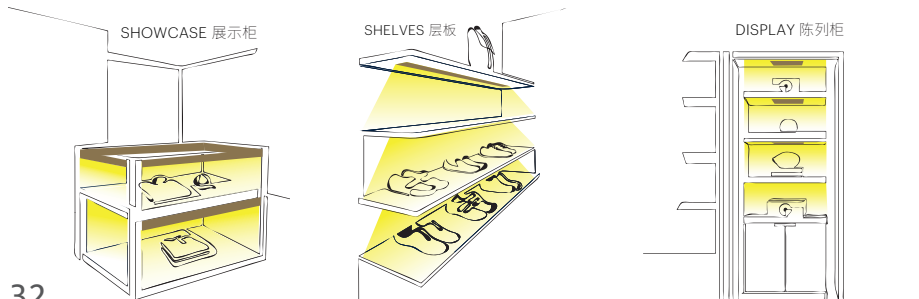
DIMENSIONS(MM) 尺寸






The adjustable angle of the light body has been added to the PUNTO for a richer presentation of light.
在 PUNTO 的基础上增加了灯体可调角的功能，让光的呈现更丰富。

-  Precise focus 精准聚焦
-  Angles available 角度可选
-  Adjustable angle of lamp body 灯体可调角






PUNTO PRO

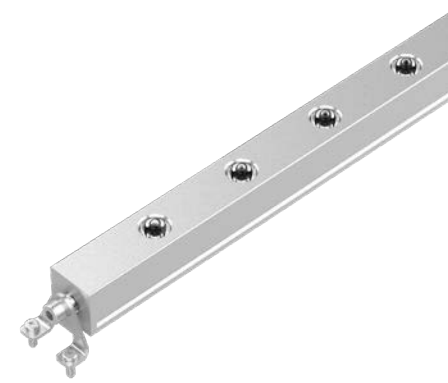LINEAR LIGHTS
线条灯系列




SPECIFICATION 技术参数

- Vdc** 24VDC
- W** 18W/m
- Ra** Ra95
- K** 2700K / 3000K / 3500K
- lm/w** 69lm/w (20°,80°)
79lm/w (30°,50°)
-  20° / 30° / 50° / 80°
- FINISH**  AD AL 铝本色
-  Screw Installation 螺丝安装

PUNTO PRO 19W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		20°	3500K
30	11		76255
40	18		27452
60	22		19064
100	37		6863
300	111		763

DIMENSIONS(MM) 尺寸

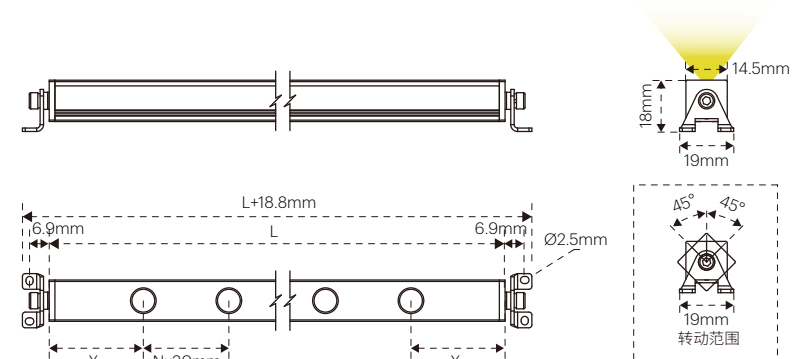



Microline 45, the well-known minimal size linear lamp for glass displays, offers now new features. With the new Chip on Board (COB) LED Strip the Microline has a diode-free and smooth light output. Minimal slim dimensions, ideal for display and showcase; the slightly asymmetrical shape reduces the glare. CE conformity and UL approval for distribution in all major markets.

Microline 45, 用于玻璃展示的最小尺寸线性灯, 现在提供了新的功能。由于采用了新的板上芯片 (COB) LED 条, Microline 具有无二极管和平滑的光输出。最小的纤细尺寸, 是展示和陈列的理想选择; 略微不对称的形状减少了眩光。符合 CE 和 UL 认证, 可在所有主要市场销售。


- 

Soft light
光线柔和
- 

Perfect hidden cable
完美隐藏导线
- 

Minimal body of
6.5*6.5mm
灯体纤细6.5*6.5毫米
- 

Length
customizable
长度可定制

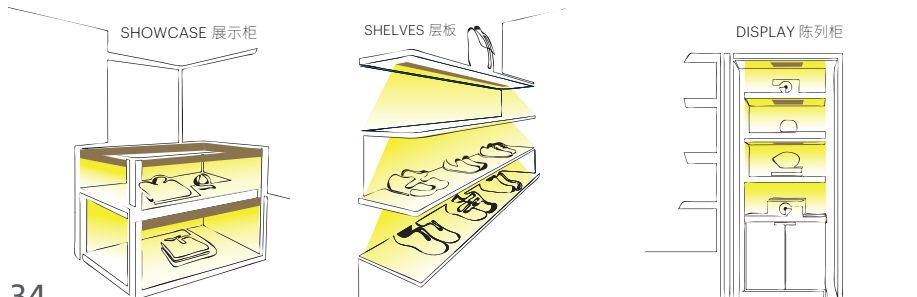




MICROLINE 45


LINEAR LIGHTS
线条灯系列



SPECIFICATION 技术参数

- V_{DC}** 24VDC
- W** 9W/m
- R_a** Ra90
- K** 3000K / 4000K
- LUMEN (L_u)** 500lm/m (4000K)
-  90°
- FINISH**  AD AL 铝本色
-  Adhesive Installation 背胶安装

DIMENSIONS(MM) 尺寸

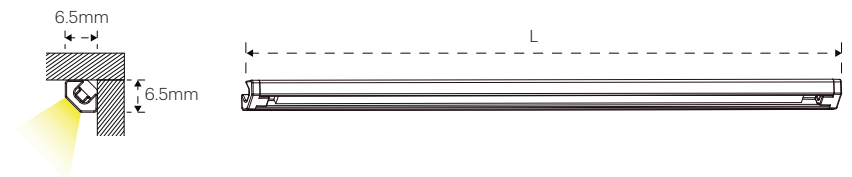



NANO TUBULAR II has a minimalist design. The luminous surface and the structure of lamp body are complementary to each other, ensuring higher comfort while enhancing the aesthetics of the product, and becoming more pleasing to the eye when fitting into the space. When the gentle light is on, we would forget the fact that it is a lamp.

NANO TUBULAR II 造型极简，发光面与灯体结构相辅相成，确保了更高的舒适度，同时增强了产品的美感，与空间搭配起来更美观。当它柔和的光亮起时，我们会忘记它是一盏灯的事实。




Soft light
光线柔和



Perfect hidden
cable
完美隐藏导线




Slim lamp body of
10*11.2mm
灯体纤细10*11.2毫米



36

NANO TUBULAR II

LINEAR LIGHTS
线条灯系列

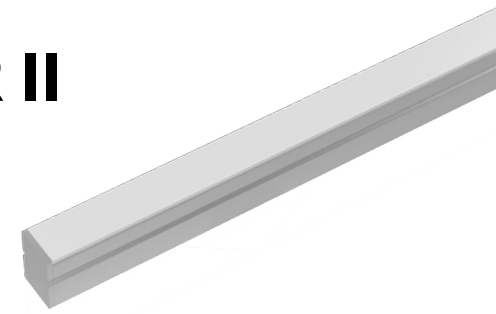


SPECIFICATION 技术参数

Vdc	24VDC
W	19W/m
Ra	Ra90
K	3000K / 3500K / 4000K
LUMEN (Lu)	907 lm/m (3000K) 893 lm/m (3500K) 875 lm/m (4000K)
	95°
FINISH	03 BLACK 黑色 12 AD AL 铝本色
	Screw Installation 螺丝安装
	Magnetic Installation 磁吸安装

NANO TUBULAR II 300mm			lx
H mm	DIAMETER mm	BEAM ANGLE	
		110°	3000K 3500K 4000K
100	290		8931 8924 8712
200	570		2233 2231 2178
300	850		992 991 968
400	1130		558 557 544
500	1420		357 357 348

DIMENSIONS(MM) 尺寸

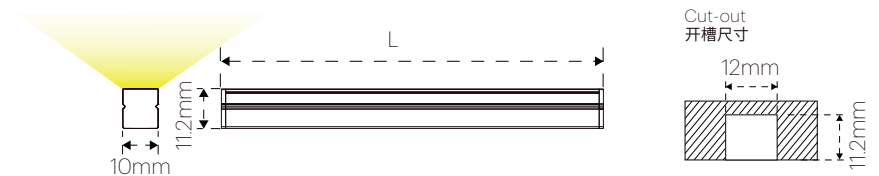

37



STARLINK, a product made for curves, has a richer and more varied form, with a wide range of light angles and classic colours, giving starlink a unique personality and a wide range of applications.

STARLINK, 一款为曲线而生的产品, 形态更丰富多变, 丰富的出光角度和经典的颜色, 让 starlink 独具个性, 应用场景更丰富多元。


- 

Curve lighting
曲线照明
- 

Precise focus
精准聚焦
- FINISH


Colours available
颜色可选
- 

Angles available
角度可选

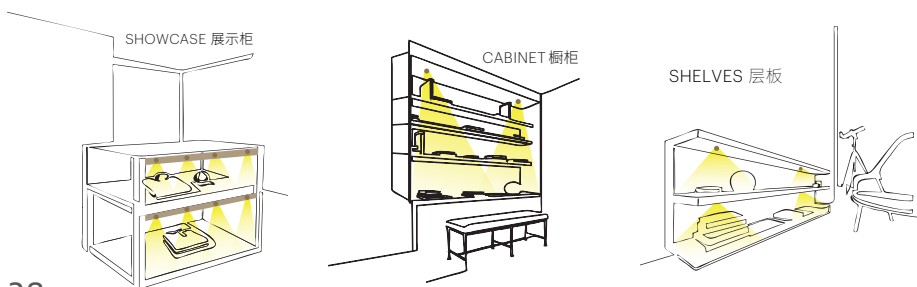





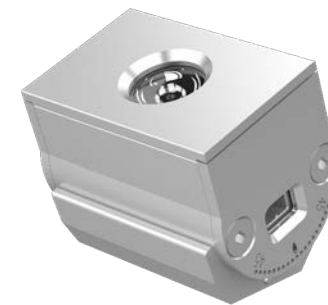

STARLINK

SPOTLIGHTS
点光源系列



SPECIFICATION 技术参数

- Vdc** 24VDC
- W** 1.2W
- Ra** Ra95
- K** 2700K / 3000K / 3500K / 4000K
- lm/w** 75lm/w(15°)
-  15° / 25° / 30° / 40°
- FINISH**  ⁰¹ WHITE 白色  ⁰³ BLACK 黑色  ¹⁸ GOLDEN 金色
-  Screw Installation
螺丝安装
- MAX**  Maximum connection limit:30Pcs
最长连接建议:30个

STARLINK 1.2W			lx
H cm	DIAMETER cm	BEAM ANGLE	
		15°	3000K
30	11		6069
50	18		2185
60	21		1517
100	36		546
300	107		61

DIMENSIONS(MM) 尺寸

